


光伏线缆 PV Cable

证书 Certification

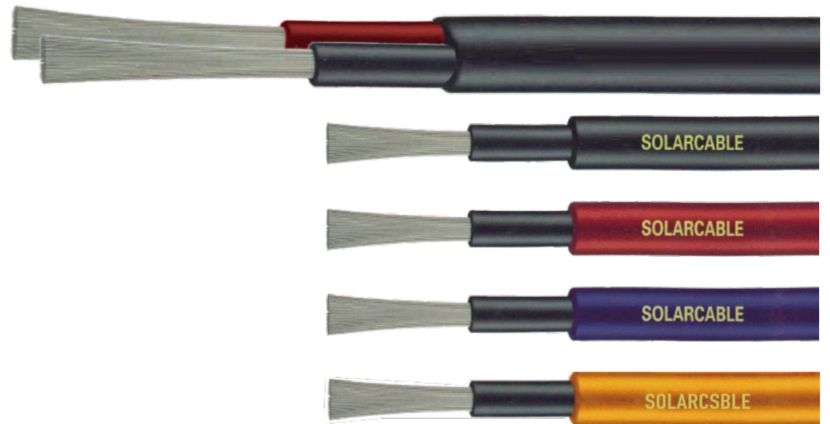

技术参数 Specifications

EN50618 H1Z2Z2-K 62930 IEC 131 UL4703 系列产品

| 横截面 Cross Section | 额定电压 Rated Voltage | 导体 Conductor | 电缆外径 Cable Diameter | 导体的电阻 Resistance Of Conductor |
|---------------------------|-----------------------|--------------|------------------------|-------------------------------|
| 1.5mm ² | 1500V DC(TUV) | 30*0.25mm | 4.7±0.15mm | ≤13.7Ω/KM |
| 2.5mm ² | 1500V DC(TUV) | 49*0.25mm | 5.2±0.15mm | ≤8.21Ω/KM |
| 4.0mm ² | 1500V DC(TUV) | 56*0.285mm | 5.7±0.20mm | ≤5.09Ω/KM |
| 4.0mm ² | 1500V DC(IEC) | 56*0.285mm | 5.7±0.20mm | ≤5.09Ω/KM |
| 4.0mm ² | 1500V DC(TUV) | 56*0.285mm | 6.1±0.20mm | ≤5.09Ω/KM |
| 4.0mm ² | 1500V DC(TUV) | 56*0.285mm | 6.15±0.20mm*12.5±0.3mm | ≤5.09Ω/KM |
| 4.0mm ² /12AWG | 1500/2000V DC(IEC/UL) | 56*0.285mm | 6.4±0.20mm | ≤5.09Ω/KM |
| 4.0mm ² /12AWG | 1500/2000V DC(TUV/UL) | 56*0.285mm | 6.4±0.20mm | ≤5.09Ω/KM |
| 6.0mm ² | 1500V DC(IEC) | 84*0.285mm | 6.4±0.20mm | ≤3.39Ω/KM |
| 6.0mm ² | 1500V DC(TUV) | 84*0.285mm | 6.4±0.20mm | ≤3.39Ω/KM |
| 6.0mm ² /10AWG | 1500V DC(TUV/UL) | 84*0.285mm | 7.0±0.20mm | ≤3.39Ω/KM |
| 6.0mm ² /10AWG | 1500V DC(IEC/UL) | 84*0.285mm | 7.0±0.20mm | ≤3.39Ω/KM |
| 10mm ² | 1500V DC(TUV) | 77*0.40mm | 7.8±0.20mm | ≤1.95Ω/KM |
| 16mm ² | 1500V DC(TUV) | 128*0.40mm | 9.5±0.20mm | ≤1.24Ω/KM |
| 25mm ² | 1500V DC(TUV) | 196*0.40mm | 11.8±0.30mm | ≤0.795Ω/KM |
| 35mm ² | 1500V DC(TUV) | 276*0.40mm | 13.3±0.30mm | ≤0.565Ω/KM |